


FALLPROTEC

—
Height Safety Products

+352 26 55 09 30 | www.fallprotec.com

FALLPROTEC

RIGID RAIL FOR HEIGHT SAFETY





📍 Tarragona, Spain

RIGID RAIL FOR HEIGHT SAFETY

EN795:2012 Type D | CEN/TS 16415:2013
ANSI/ASSP Z359.6 : 2009
OSHA 1910 Subpart D
CSA Z259.16

The SafeAccess is an undeformable fall arrest rail for industrial applications. Installed in overhead configuration, it is the most suitable system when the fall clearance is low.

ATEX certified for potentially explosive atmospheres, this rail is also ideal for petrochemical industries and highly corrosive environments.

The aluminium rail is protected by a high-quality powder coated surface treatment that resists to marine environment.

An ultra-resisting height safety rail


The SafeAccess is tested and certified according to European and ANSI standards.

- Undeformable in case of a fall
- ATEX certified for explosive atmospheres
- Number users (EN) = Up to 4 users
- Number of users (ANSI & CSA) = 2 users
- Low maintenance
- Follows the end user instantly
- Bendable on demand (min. radius = 600mm (23,6")
- Fixed to steel structure or concrete


Applications:



Industrial



Loading
bays

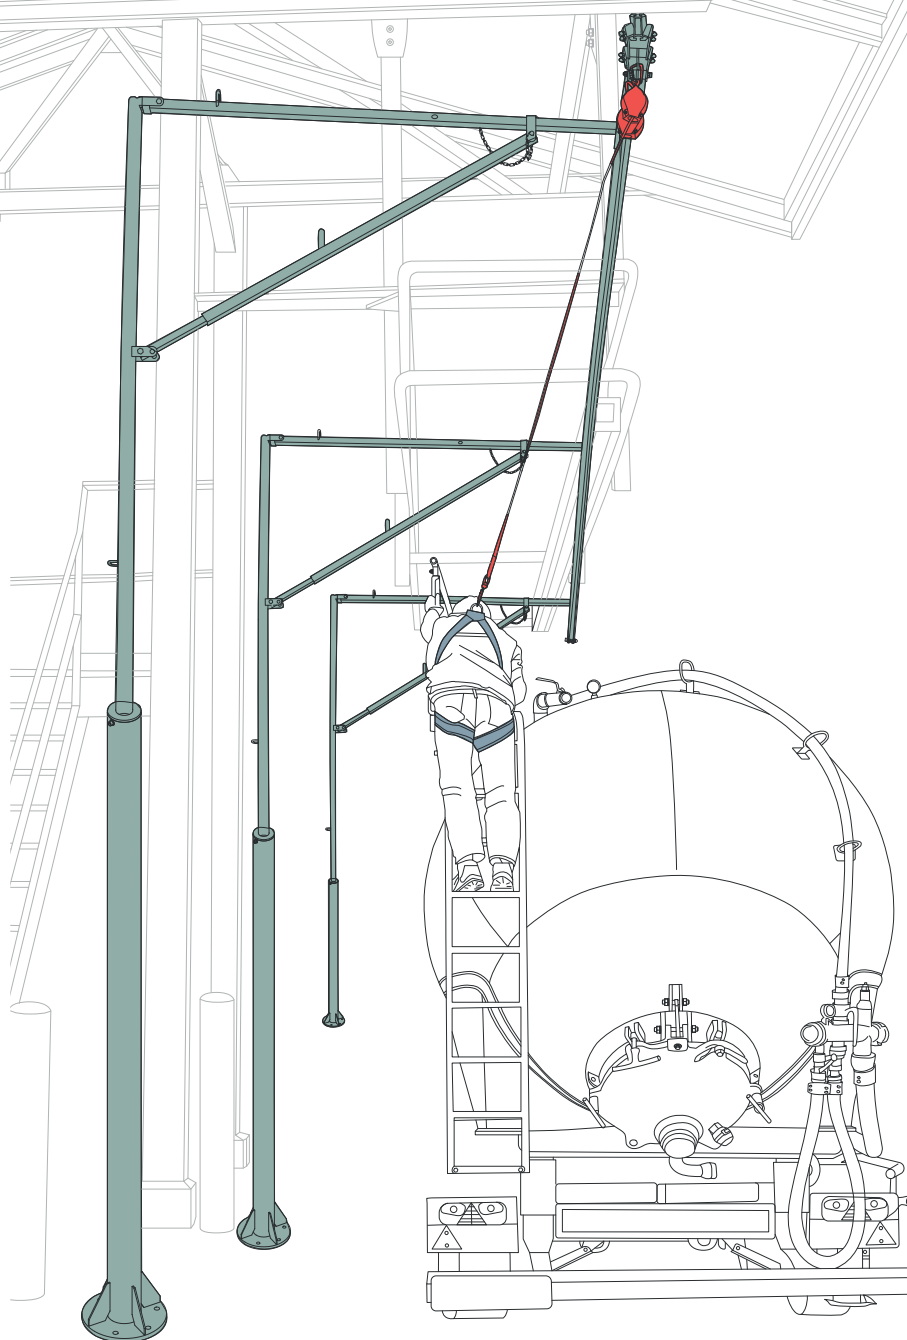

SafeAccess rail for fallarrest

The SafeAccess can be used for fall arrest in many combinations: ground, wall, ceiling or jibs above a loading bay.

The robust design suits intensive applications, the rail remains usable years after being installed. In case of a fall, it is one of the very few systems where there will be no need to replace any part. Combined with a safety block enables the safest possible fall arrest.

EN795:2012 Type D | CEN/TS 16415:2013

ANSI/ASSP Z359.6 : 2009


OSHA 1910 Subpart D

CSA Z259.16

			
(EN) x 4	(ANSI&CSA) x 2 606016		



Click here to follow the product YouTube playlist

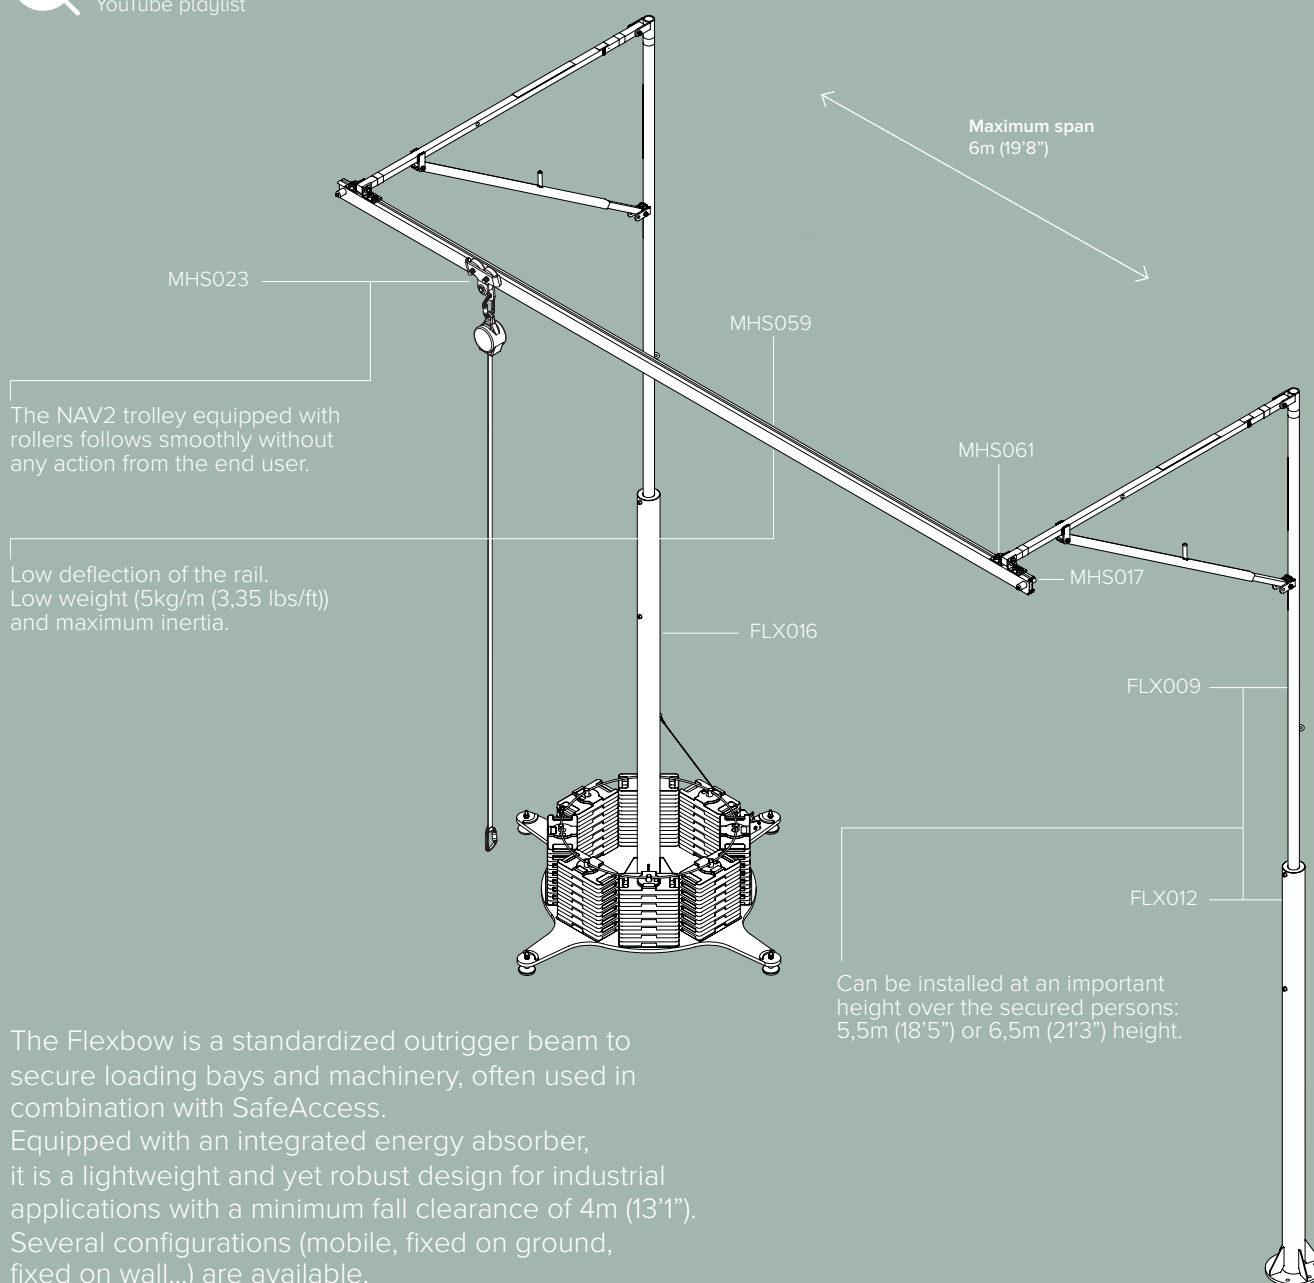

The Flexbow is a standardized outrigger beam to secure loading bays and machinery, often used in combination with SafeAccess.

Equipped with an integrated energy absorber, it is a lightweight and yet robust design for industrial applications with a minimum fall clearance of 4m (13'1"). Several configurations (mobile, fixed on ground, fixed on wall...) are available.

Fixing brackets

Fixing the rigid rail on existing industrial sites is facilitated thanks to the standardized fixing brackets of Fallprotec.

The rail is generally mounted to the ceiling with either:

- Plate MHS038 for concrete
- Universal fixing plates for clamping on beams between 50 (1,96") and 300mm (11,81") width.
- Adjustable hanger brackets.
- Rigid welded steel hanger brackets


Ceiling bracket

It comes with MHS062 bolts

MHS038



Fixing bracket by clamping

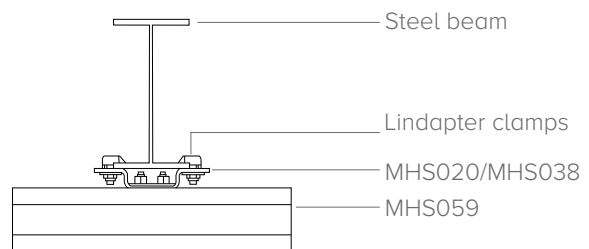

The adjustable brackets enable to:

- Adapt to the size of the beam (50 – 300mm) (1.96" – 11.81")
- Compensate the slope of the roof
- Tube length can be cut on site to adapt to final measurements.
- Quick delivery with standard components



Trolleys

NAV2 for fall arrest

Trolley in stainless steel with POM wheels.

Follows instantly the end user while walking, even if the rail is installed 20 meters (65') above the walking surface. Typically combined with a self-retractable lanyard.

MHS023



Fallprotec's SafeAccess lifelines worldwide

Click here to view more
case studies worldwide
on our website




CHOOSING FALLPROTEC MEANS

- One reference for global assistance
- Certified by notifying bodies as per latest European standard
- Quality control: ISO9001:2015.
E.C. Quality of Production « Article 11D »
- Product liability insurance
- Warranty
- One-Stop-Shop




📍 Truck loading station
France

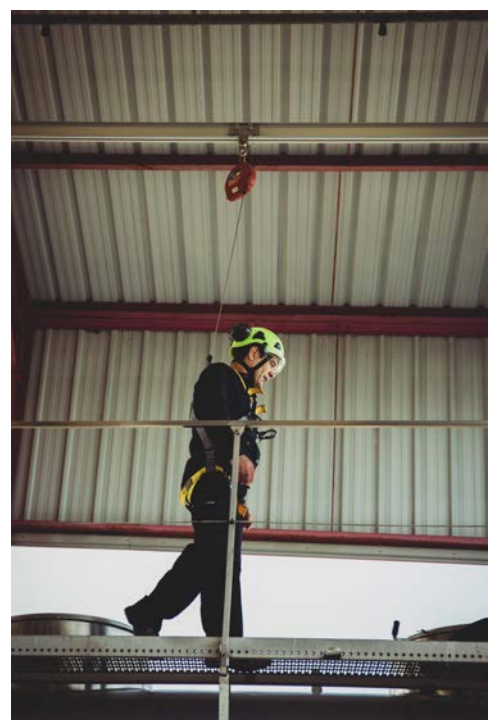

📍 Oil&Gas loading station
Tarragona, Spain





📍 SNCB
Mechelen, Belgium

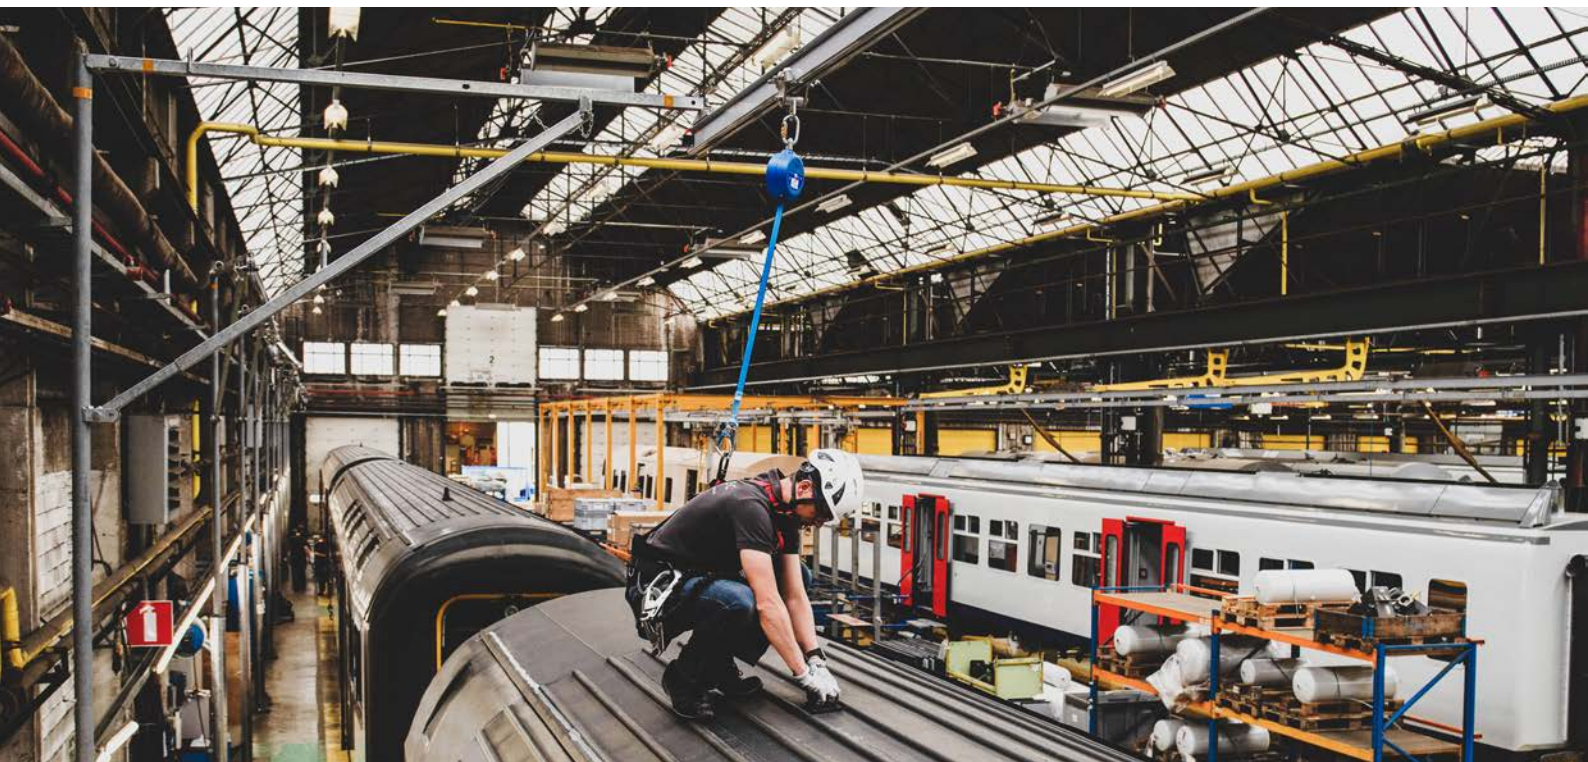



📍 Airbus
Toulouse, France



📍 Query
Arganda del Rey, Spain

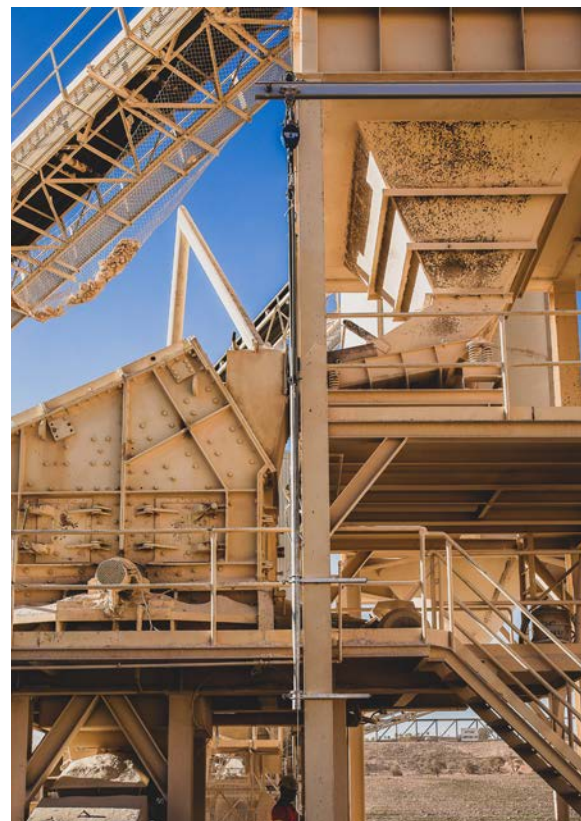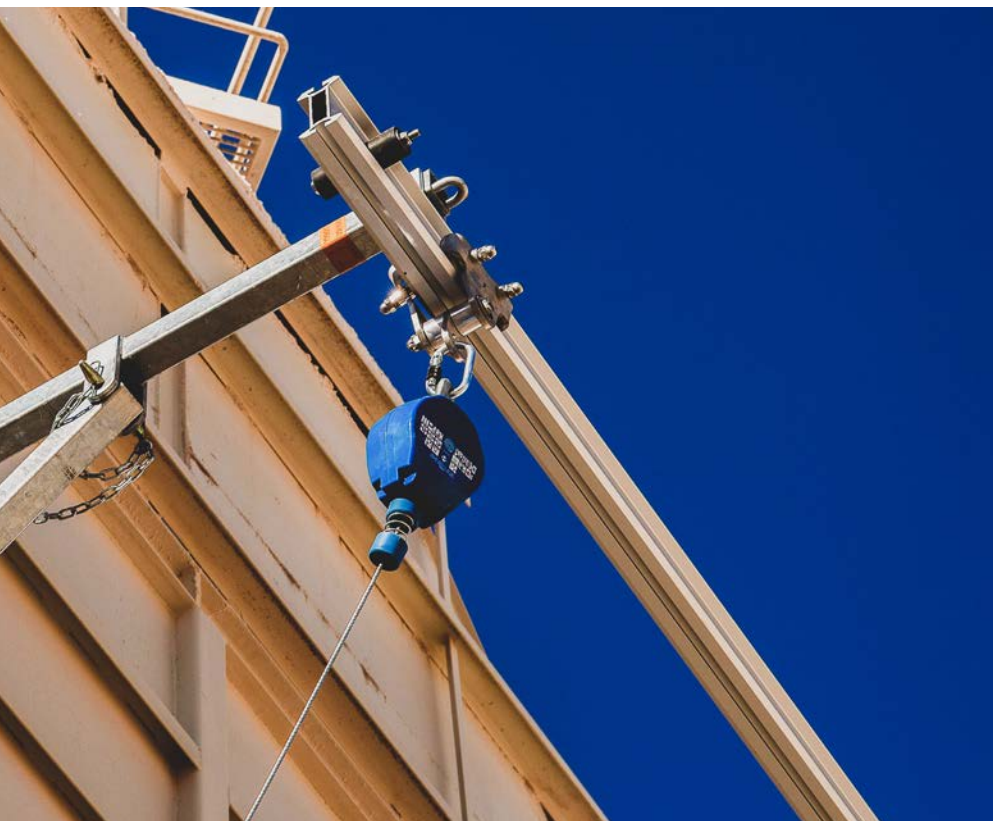

📍 Formwork industry
Montcada i Reixac, Spain

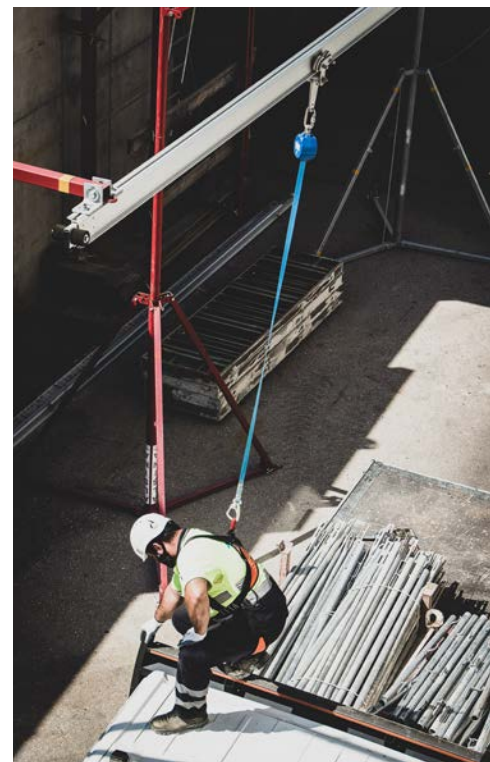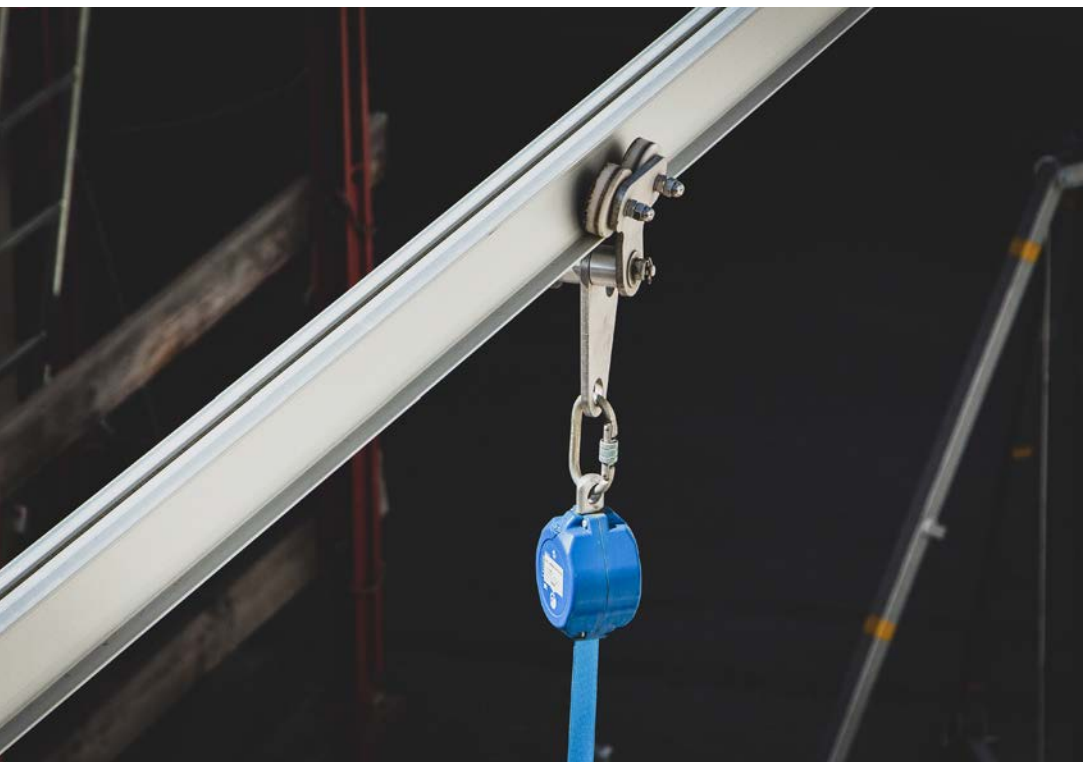

📍 BlueSun
Mataró, Spain



FALLPROTEC SA

ZARO 2-4 rue Gustave Loosé
8346 Grass
Luxembourg

T: +352 26 55 09 30
marketing@fallprotec.com

FALLPROTEC SL

Eduard Calvet i Pintó 4
Pol. Ind. Vallmorena
08339 Vilassar de Dalt
España

T: +34 93 114 22 31
info@fallprotec.es

FALLPROTEC USA

3500 S Dupont Hwy
Dover, DE 19901
USA

T: +1 205 388 0548
usa@fallprotec.com

FALLPROTEC ME

JLT, Mazaya Business Avenue,
Tower BB1, Oce 1108
P. O. Box 487115
United Arab Emirates

T: +971 4 399 3764
eh@fallprotec-me.com

FALLPROTEC SRL

Via Giovanni Falcone 23
24050 Zanica Bergamo
Italia

T: +39 375 713 8515
va@fallprotec.com

+352 26 55 09 30
www.fallprotec.com

Follow us

[fallprotec](#) | [f](#) [@](#) [in](#) [You Tube](#)

FALLPROTEC

Height Safety Products

